


Selection Guide




DISPLAY UNIT






Ordering information

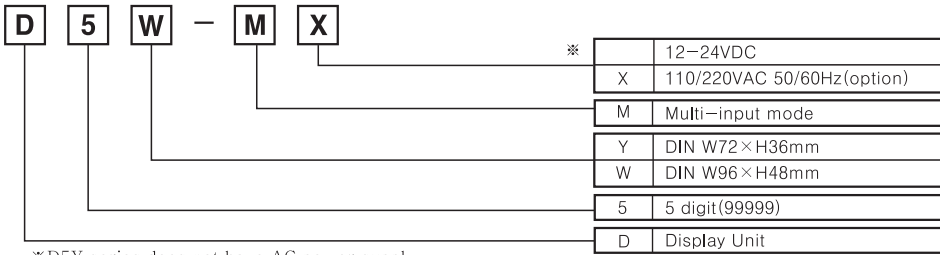

*D5Y series does not have AC power supply.


Specifications

Model	D5Y-M	D5W-M	D5W-MX
Appearances & Dimensions	 [W72×H36×L91mm]		 [W96×H48×L99.6mm]
Digit size	W8×H14.1mm		
Power supply	12-24VDC ±10%	12-24VDC ±10%	110/220VAC 50/60Hz ±10%
Display character	0-9, Decimal point		
Max. clock speed	Max. 100Hz~5kHz, in case of duty ratio(ON:OFF) 1:1		
Input method	BCD input ⇄ Static 100ms, Dynamic, Serial(4/ 5/ 16/ 20/ 25Bit)type [by inner DIP switch]		
Input logic	Selectable positive or negative logic [Internal DIP switch(SW6)]		
Input level	HI:5-24VDC, LOW:0-2VDC	HI:4.5-24VDC, LOW:0-1.2VDC	
Input resistance	22kΩ	12kΩ	


Display FND	Red LED(7 Segment)	Red LED(7 Segment)	Green LED(7 Segment)	Red LED(16 Segment)	Green LED(16 Segment)
Model	D1SC-N	D1SA-RN	D1SA-GN	D1AA-RN	D1AA-GN
Appearances & Dimensions	 [W72×H96×L25.7mm]	 [W20×N+12×H33×L56.5mm]			 [W20×N+12×H33×L56.5mm]
Digit size	W31.9×H56.9mm	W11×H20mm			
Power supply	12-24VDC ±10%				
Display character	Decimal code:0-9, decimal point, Hexa-decimal code:0-F, decimal point			0-9, A to Z, decimal point, 24 kinds of symbols	
Max. response frequency	Max. 3kHz [In case of duty ratio(ON:OFF) 1:1]	Max. 3kHz [But, Duty rate(ON:OFF) 1:1 only]			
Input method	BCD input ⇄ Selectable Parallel or Serial mode[by back DIP switch(SW2)]	BCD input ⇄ Parallel : Parallel 4 bit binary data, Zero blank, Latch, Decimal point Serial : Serial 4 bit or 5 bit (Including decimal point), Clock, Zero blank, Latch, Decimal point (without serial DOT)		BCD input ⇄ Parallel : Parallel 6 bit binary data, Latch, Decimal point Serial : Serial 6 bit or 7 bit (including decimal point), Data, Clock, Latch, Decimal point (without serial DOT)	
Output	Data out (In case of serial input), Zero blank out				
Input logic	Selectable positive or negative logic [by back DIP switch(SW1)]	Selectable positive or negative logic by soldering on PCB			
Input level	HI:4.5-24VDC, LOW:0-1.2VDC Max.				
Input resistance	12kΩ	20kΩ			

Connections (D5Y/D5W series)


STATIC INPUT

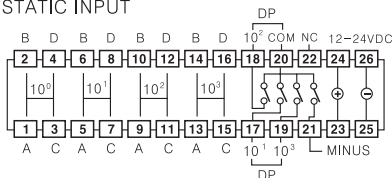



4/5BIT SERIAL INPUT

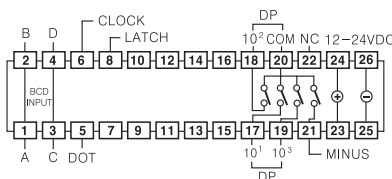

DYNAMIC INPUT

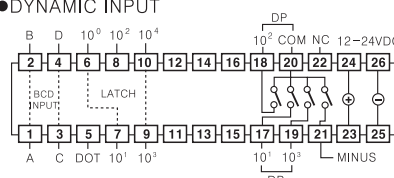

SERIAL INPUT

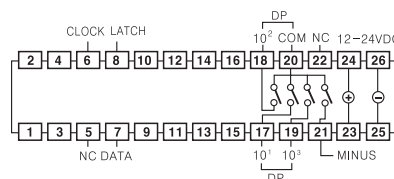

*This power terminal is for AC power option for D5W type.

- *In case of static input, 5 digits type is not available because of external terminal of input signal.
- *The minus signal cannot be displayed because the display range is from 0 to 99999 when using 5 digits for dynamic, 4/5bit serial and serial input.
- *The input signal of external terminals (pin #17, 18, 19) and minus signal terminal (Pin #21) is displayed when it is connected to com (#20 pin) regardless input logic.